


Benefits

- 1. Replace conventional Linear Highbay Lights
- 2. Precision Die Cast Aluminum Housing
- 3. Fade Resistant Powder Coat Finish
- 4. Easy Installation
- 5. CE ROHS listed











BB-GKD-XXX-4F1

Features

- 1. Beam angle: 120 degrees.
- 2. Aluminum die-casting heat sinks is good for heat dissipation.
- 3. It's major to replace the conventiona linear highbay light.
- 4. Green, energy saving, long and reliable life of 50,000 hours.
- 5. No RF interference, No IR/UV radiation, no mercury pollution.
- 6. Wide colour availability in degrees Kelvin(K),2700-6700K.
- 7. Streamline exterior design, beautiful appearance.
- 8. Environment friendly, energy saving (70~80%).
- 9. Special circuit design, each LED work separately, avoiding the single broken LED influence problem.







Application


- 1. Parking Areas Lighting.
- 2. Industrial Workshop Lighting.
- 3. Warehouse Lighting.
- 4. Stadium Lighting.
- 5. Airport Lighting.



Factory








Warehouse Gym


SPECIFICATIONS

Power	60W	100W	150W	200W	240W	300W		
Model	BB-GKD-60W-2FT	BB-GKD-100W-2FT	BB-GKD-150W-2F1	BB-GKD-200W-4FT	BB-GKD-240W-4FT	BB-GKD-300W-4FT		
Luminous Flux	7800lm	13000lm	19500lm	26000lm	31200lm	39000lm		
Replacement	HPS 200W	HPS 300W	HPS 400W	HPS 600W	HPS 800W	HPS 1000W		
Light Source	SMD LED							
Luminous Efficacy	130lm/W							
Operation Temp.	-40 to +45℃							
ССТ	3000K WW / 4100K NW / 5000K DW / 5700K CW							
CRI	80+							
Life Span	50,000 hours at 25℃							
Voltage	100-277VAC/50-60Hz 200-480VAC/50-60Hz Available							
Dimming	0-10V Dimmable optional							
Mounting options	Chain							
Beam Angle	120°							
PF	>0.95							
Warranty	5Years							


DIMENSIONAL DRAWING

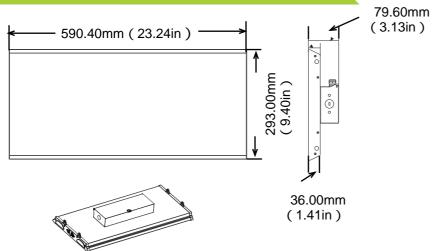

- *2FTnormal design:590.4*293*79.6 mm
- * Available for 60w,100W,150W

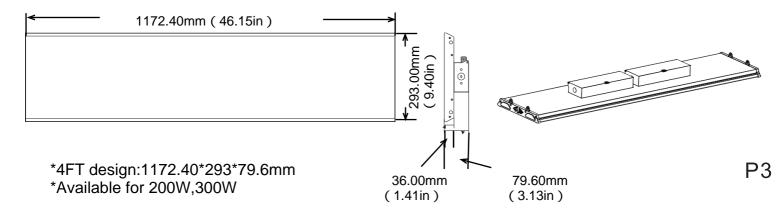


LUMINOUS INTENSITY DISTRIBUTION

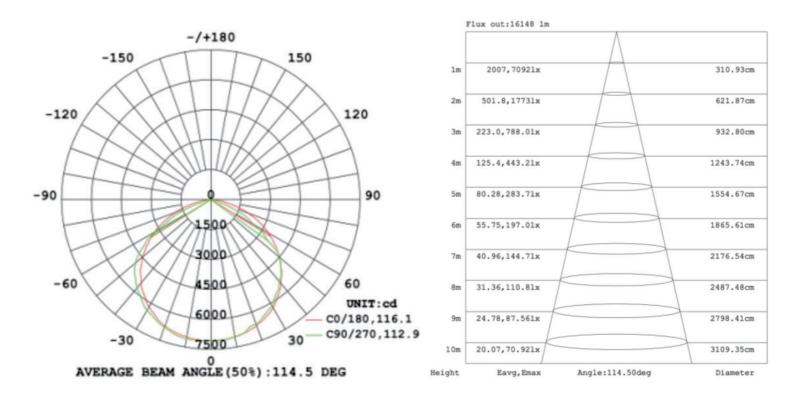

PROJECTS

By using our 100W Linear Highbay Light to replace 300W Traditional linear lamp, the customer is now able to save a lot per month from his electric bill.

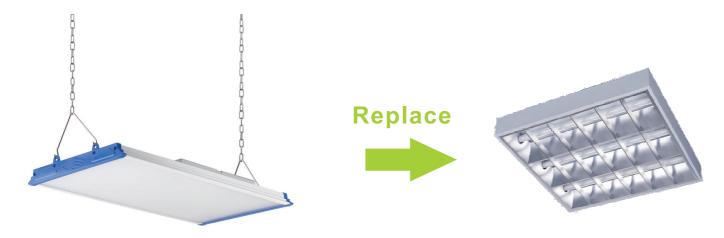

100W LED = 300W Traditional

Note:

- · Don't take the LED lamp apart.
- The LED lamp must work under the right voltage according to the specification.

INSTALLATION

Suspension chain Mounting





- Step1. Turn off the power before installation.
- Step2. Hang the four rings of the lamp with four chains.
- Step3. Wiring right("Black"is connected to"L","White"connect to"N","Green"to "Ground").
- Step4. Make sure it is secure and finished.

PACKING INFO



Packaging	Carton Size(mm) (L*W*H)	N.W	G.W	Volume weight
2pcs/CTN(2F1)	680*180*380mm	8.0kg	9.0kg	9.5kg
2pcs/CTN(2x2F1)	680*180*680mm	10.4kg	11.5kg	17.0kg
2pcs/CTN(4F1)	1220*180*380mm	10.4kg	11.5kg	17.0kg